

U-CROWN



Timer



Light Function



R410A



Auto Clean



Lock



LED Display



LED remote control



3.5m connecting pipe



Dehumidifying


Features: ● Standard ● Optional

Wide Ambient Operation Range


From -30°C to 54°C Ultra low ambient heating with 2-stage compressor

Operation sketch map of 2-Stage compressor

Blue: Low-pressure suction
Purple: Medium-pressure inflation
Red: High-pressure discharge



Wifi-Control

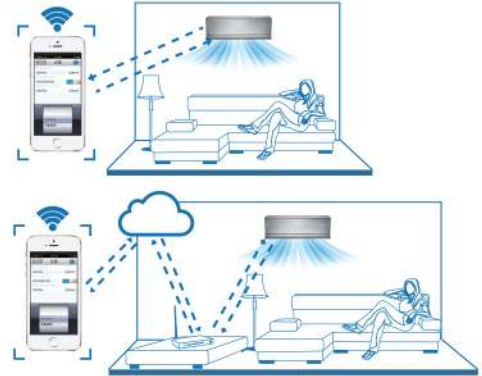

Intense Field Dielectric (IFD)

Competent in catching PM2.5



First-stage filtering of PM2.5



Efficient at removing PM 2.5



Model			GWH09UB-K3DNA4F	GWH12UB-K3DNA4F	GWH18UC-K3DNA4F	
Function			Cooling/Heating	Cooling/Heating	Cooling/Heating	
Capacity	Cooling	Btu/h	9000	12000	18000	
	Heating	Btu/h	10200	12300	18000	
Pdesignh(A)/Pdesignh (C)		Btu/h	9200/9200	10200/10200	17700/18000	
SEER/SCOP(A)/SCOP(C)		W/W	7.5/4.6/3.8	7.0/4.6/3.8	6.1/4.0/3.1	
Energy Class			A++/A+/A	A++/A+/A	A++/A+/B	
Power Supply		Ph, V, Hz	1Ph, 220-240V, 50Hz	1Ph, 220-240V, 50Hz	1Ph, 220-240V, 50Hz	
Power Input	Cooling	W	600	920	1600	
	Heating	W	750	1020	1420	
Rated Current	Cooling	A	6.5	6.8	9.1	
	Heating	A	6.8	7.1	10.6	
Airflow Volume		Indoor	m³/h	650	720	800
Indoor Unit						
Sound Pressure Level	Indoor	dB(A)(SH/H/M/L)	56/50/48/46	57/51/49/47	58/54/52/48/45/37/34	
Outline Dimension	WxHxD	mm	860×305×170	860×305×170	960×320×205	
Package Dimension	WxHxD	mm	935×295×388	935×295×388	1043×333×403	
Net Weight/Gross Weight		Indoor	kg	12.5/15	12.5/15	15/18
Outdoor Unit						
Sound Pressure Level	Outdoor	dB(A)	62	62	63	
Piping Connection	Gas	mm	φ12	φ12	φ12	
	Liquid	mm	φ6	φ6	φ6	
Outline Dimension	WxHxD	mm	899×596×370	899×596×370	950×700×396	
Package Dimension	WxHxD	mm	948×645×420	948×645×420	1029×750×458	
Net Weight/Gross Weight		Outdoor	kg	43/46	43/46	51/55.5
Loading Quantity	40'GP	sets	165	165	123	
	40'HQ	sets	191	191	141	