



**HJT**  
Bifacial  
Glass Glass

**30**  
Years

**Linear Power GUARANTEED**

**Electrical Characteristics @ STC**


HS400M-60-166GP	Pmax	Vmp	Imp	Voc	Isc	Mod. %
	400W	38.43V	10.41A	45.45V	11.13A	21.96%

\*STC (Standard Test Condition) : Irradiance 1000W/ m<sup>2</sup>, Cell Temperature 25°C , Air Mass 1.5

**Inegrated Power Characteristics @ STC**

HS400M-60-166GP	Pmax	Vmp	Imp	Voc	Isc	Power Gains
Front ref.385W	480W	37.76V	12.71A	44.80V	13.65A	25%

1755

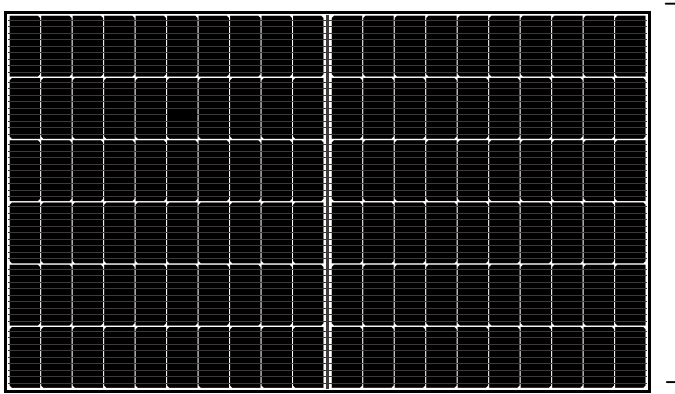

1038

30mm

Weight 22.8 kg

**Packaging Configuration**

PACKAGE	40'HQ Container	(PALLET	PALLET	SMALL PAC)
PCS	949 PCS	(35 PCS	35 PCS	3 PCS)

CAUTION: read the installation instruction before using the product.

©2022 Hanover Solar B.V All rights reserved, The specification included in this datasheet are subject to change without notice.

**HANOVER NEW ENERGY PTY LTD**  
7 Koorabel Place  
Baulkham Hills NSW 2153  
AUSTRALIA  
+61 (0) 881 215 838




**HANOVER SOLAR GmbH**  
Herrenstrasse 13  
D30159 Hannover  
GERMANY  
+49 (0) 511 711 090 0539

**HANOVER SOLAR BV**  
Kingsfordweg 151 Amsterdam  
1043GR  
NETHERLANDS  
+31 (0) 165 203 842

**N-Type HJT technology for lower LCOE**

**Fire class A, harsh environment adaptability**

**Double-sided power generation, higher income**

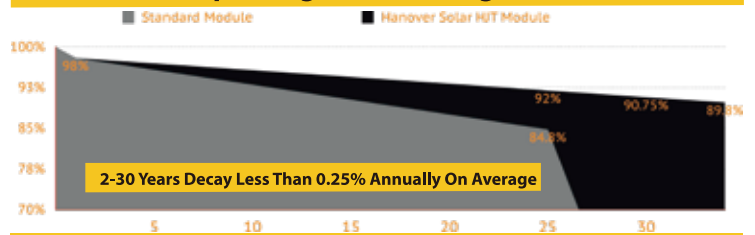

**Mechanical Characteristics**

Solar Cell Quantity	HJT 166 x 83 mm 120 pcs ( 6 x 20 )
Dimensions	1755 x 1038 x 30 mm
Glass	High Transmission Tempered Glass
Frame	Anodized Aluminium Alloy 30mm
Backsheet	Transparent Glass
Junction Box	TÜV Certified IP68
Series Fuse Rating	20A x 3 diodes
Maximum System Voltage	1500V DC
Max.Wind Load /Snow Load	2400/5400
Output Cables	300 mm / 4.0 mm <sup>2</sup>
Test Standard Condition	AM=1.5 E=1000/ m <sup>2</sup> TC=20°C
NOCT	45°C +/- 2°C
Bifaciality	85 +/- 5%
Temperature Coefficients:	Pmax -0.24%/K Voc -0.22%/K ; Isc 0.047%/K

**I-V Curve**

